

OPUS line

Technical Manual







Opus 2000/22000 Entry unit

EK50•20/30/40 Technical Manual

CHARACTERISTICS

The housing of the opus 2000/22000 entry unit combines an alpha-numeric membrane keypad with a pull handle (metal). The 8x8 mm square shaft of the pull handle drives either the lock or a boltwork. The Integrated battery compartment opens with a slider and is located in the bottom of the unit. Cable length is approximately 30 cm.


LOCKS

	Opus 30 Deadbolt
	Opus 40 Slidebolt
	Opus 60 Motorlock
	Opus 70 Rotobolt

The Opus 2000/22000 entry unit is compatible with the following locks



DIMENSIONS / MOUNTING INSTRUCTIONS

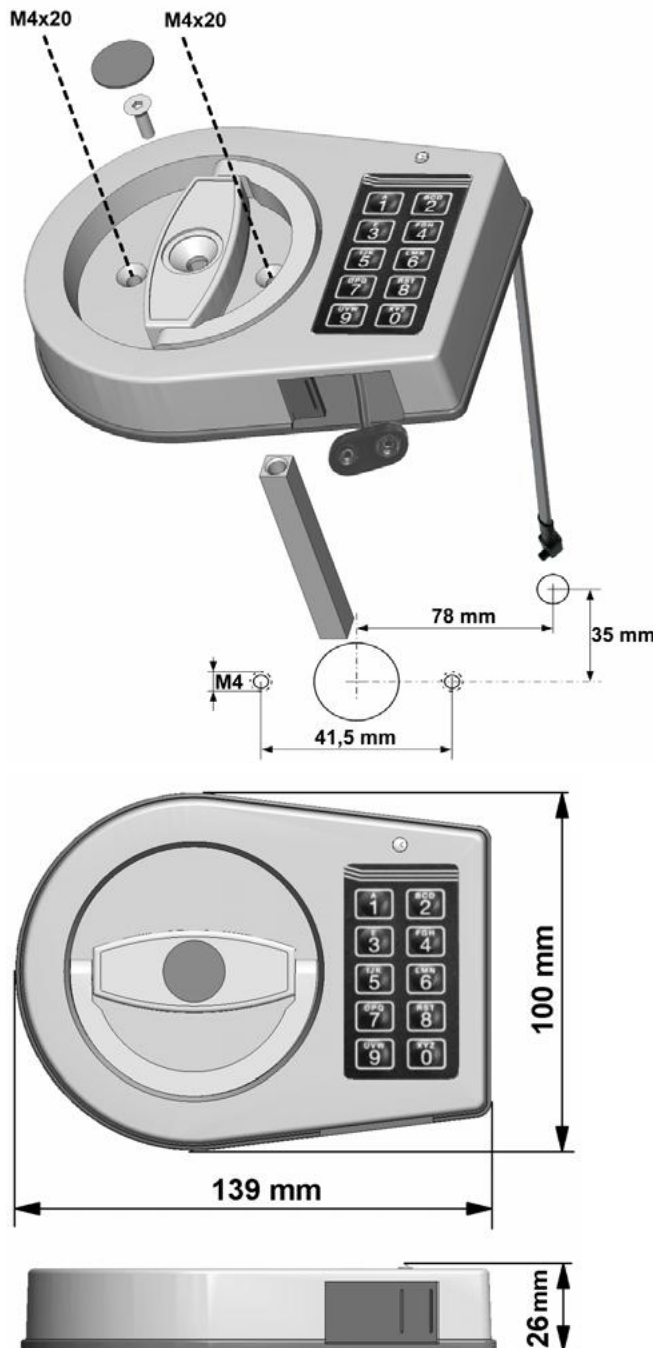

The cable should be routed through a separate cable hole. The diameter of the cable hole should be minimum 9 mm, maximum 12 mm. The spindle hole should be maximum \varnothing 13 mm. Both holes must be deburred well to avoid damage.

Cut the 8 mm square shaft to an appropriate length. Make sure the shaft drives the lock or the boltwork not just with the tip. Affix the shaft with the provided screw in the

handle and cover the screw with the label. Route the cable through the cable hole. Push the shaft as shown above into the boltwork.

Lock and boltwork must be in the “OPEN” position.

Mount the unit with two M4 or 8-32“ flathead screws (not included). Connect one (1) battery to the battery clip. Only use 9V-ALKALINE batteries from brand name manufacturers like DURACELL™.

